



Jack Wechat



Jack Facebook



Super high speed computerized cylinder bed interlock with stepping motor system



K5E

2021.01

JACK SEWING MACHINE CO.,LTD.

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com


K5E

Item: Super high speed computerized cylinder bed interlock with stepping motor system
 Feature: Low sound, high efficiency, stable performance




1 Precise trimming, long life, low sound

The sound of the whole machine is reduced by at least 6dB, lower noise;
 The force of thread trimming and presser foot lifting is doubled, thread trimming is more precise, and no failure occurs;
 Longer service life and more durable;
 Thread trimming and presser foot lifting respond faster and more efficiently

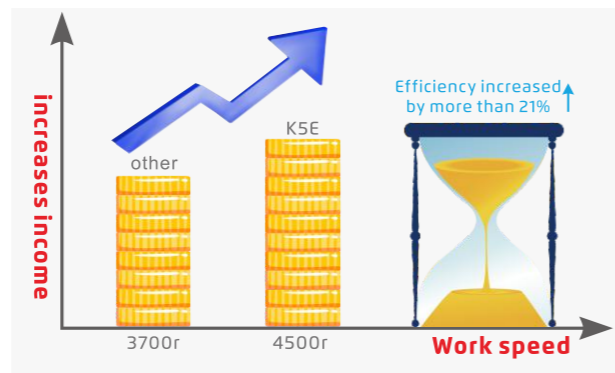

2 High speed, high efficiency

The efficiency of super high speed computerized interlock K5 is 21% higher than others in the market.
 The normal sewing speed of interlock sewing machine in market is 3700rpm, K5 normal speed is 4500 rpm, and maximum speed can reach 6000rpm. If worker salary is 4000 RMB/month, $4000 \times (1 + 0.21) = 4840$ RMB, worker's salary increase 840 RMB/month. According to the income ratio of workers and bosses with 4:6, the boss can increase income 1260 RMB/month by using K5.


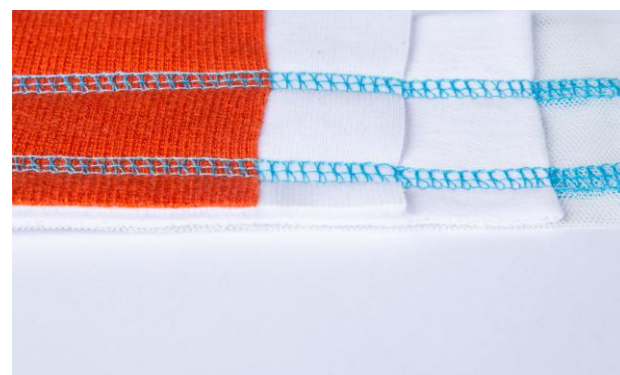


3 Wide adaptability of fabric

Machine can be used normally without adjustment from sewing mesh thin material to ordinary knitting 8-layers thickness fabric, and stitches are beautiful.

4 One-key reset, easy operation

Users can reset to self-set parameters or factory parameters according to their needs, which is more user-friendly and no worry about misoperation

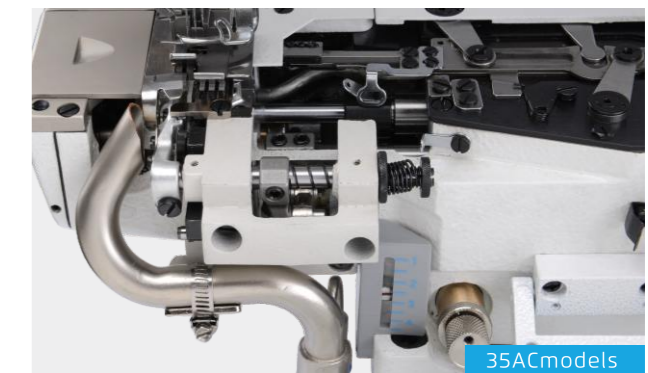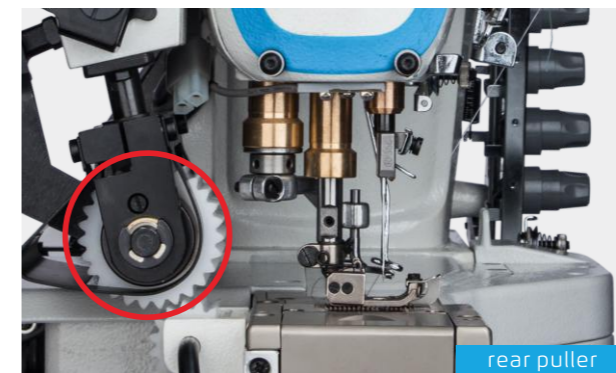

5 K5E optional add-on and m

Specification

Model	Needle	Needle No.	Thread No.	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
K5E-UT2-01GB	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5E-UT2-02GB	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5E-UT2-03GB	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5E-UT2-08AC	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K5E-UT2-35AC	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	53/65

Note:
 1.UT2: computerized machine, standard: with thread wiper, without upper thread trimmer D: direct drive