

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
				(mm)	(mm)	(mm)	(S.p.m)	(mm)		NW/GW (kg)		
C5F-02×250	包兜缝	DC×27 14#	2	4	5	5	0.8-4.2	0.7-2	3.5	7000	525*360*510	33/41
C5F-3-02/233	基本缝	DC×27 11#	1	3	/	4	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5F-3-32R2/223	密拷缝	DC×27 9#	1	3	/	1.5	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5FWF-3-02/213	无纺布	DC×27 14#	1	3	/	4	0.8-8.5	0.7-2	5	7000	525*360*510	33/41
C5F-4-M03/333	基本缝	DC×27 11#	2	4	2	2×4	0.8-4.6	0.7-2	6	7000	525*360*510	33/41
C5F-4-M03/333/H/M 厚料		DC×27 11#	2	4	2	2×4	0.8-4.6	0.7-2	6	7000	525*360*510	33/41
C5FMJ-4-53/233	毛巾缝	DC×27 11#	2	4	2	2×4	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5F-5-53/233	包条缝	DC×27 14#	2	5	3	3×5	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5F-5-03/233	5×5	DC×27 14#	2	5	5	5×5	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5F-5-03/333	3×4	DC×27 14#	2	5	3	3×4	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5F-5-A04/435	极厚料	DC×27 19#	2	5	5	5×6	0.8-5	0.7-2	7	7000	525*360*510	33/41
C5F-5-M04/435	牛仔专用	DC×27 19#	2	5	5	5×6	0.8-5	0.7-2	7	7000	525*360*510	33/41
C5F-6-03/333	基本缝	DC×27 11#	3	6	3×2	3×2×4	0.8-4.2	0.7-2	5	7000	525*360*510	33/41
C5F-6-M04/435	牛仔专用	DC×27 19#	3	6	5×2.5	5×2.5×3.5	0.8-5	0.7-2	7	7000	525*360*510	33/41

注: H/M: 薄厚适应性广, 选配X (吸风管剪刀)。选配SD (前后气吸装置), 整机体积: 525×360×510 (mm), 整机重量 33/41 (kg) ;

杰克缝纫机
全球销量遥遥领先

400-8876-858
www.chinajack.com



杰克缝纫机官方微信



杰克缝纫机官方抖音



杰克资料库



参观杰克

2021年7月版

杰克缝纫机股份有限公司

浙江省台州市椒江区东海大道东段1008号
电话 :0086-576-88177788 88177789
传真 :0086-576-88177758

JACK SEWING MACHINE CO.,LTD.

No.1008, Donghai Road East, Jiaojiang District,
Taizhou city, Zhejiang, China
TEL:0086-576-88177788 88177789
FAX:0086-576-88177758

C5F

Digital overlock machine


Powered by digital technology more faster ,more quiet

- Servo driven trimming+presser foot lifting
- One key to adjust presser foot height
- Brand-new 4th generation control box
- Adjustable from light to medium to heavy material
- Short thread tail within 5mm



SERVO MOTOR DRIVE SILENT TRIMMING AND LIFTING


CREATING THE HARMONY BETWEEN MOVEMENT AND SILENCE

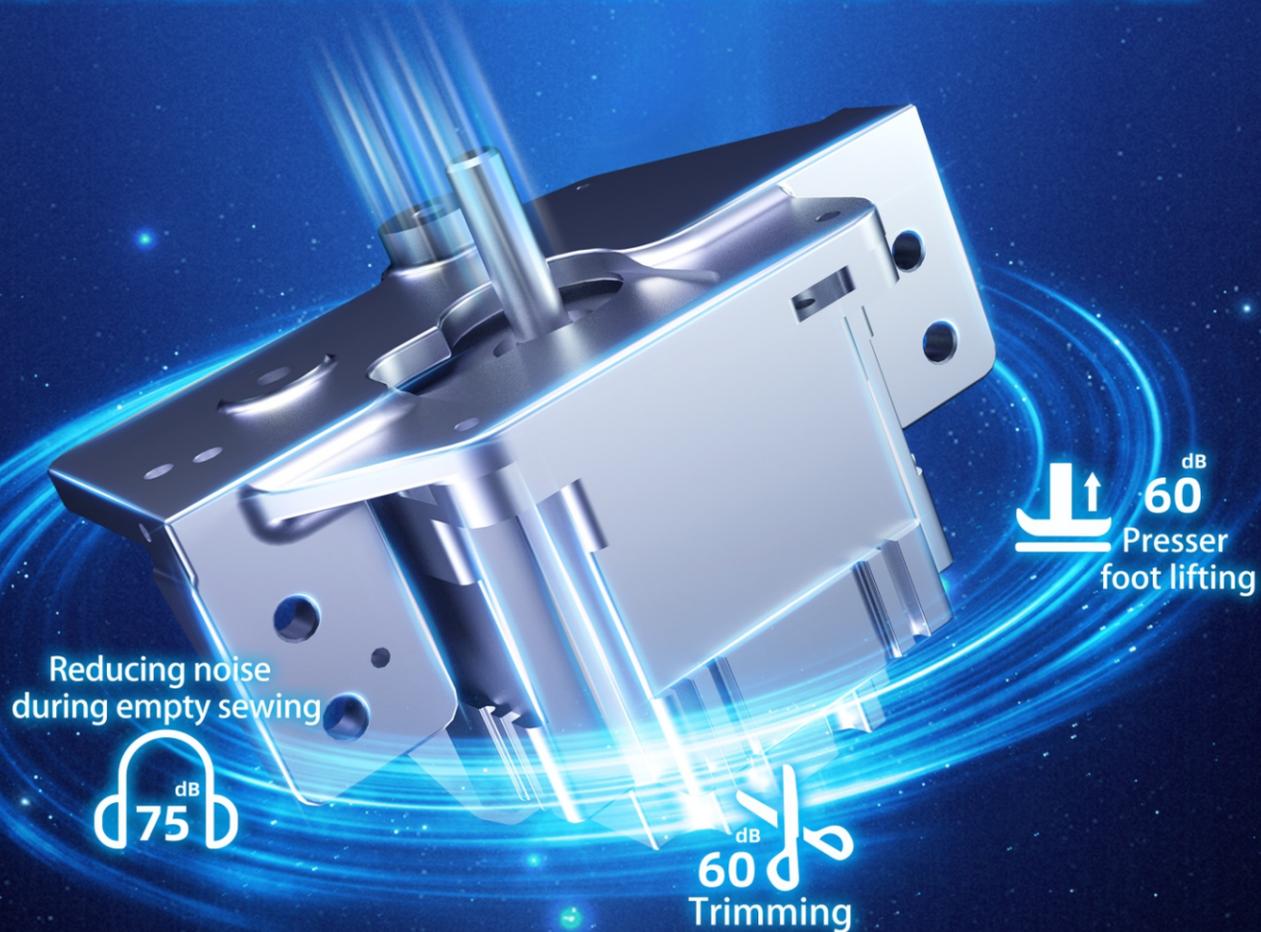

ANALYSE OF TRIMMER AND PRESSER FOOT LIFTER DRIVER		
ASPECT	SERVO MOTOR DRIVE	MAGNET DRIVE
VOICE	SUPER SILENT OF TRIMMING AND LIFTING, UNDER 60DB	NOISY, OVER 80DB
SPARE PARTS LIFE SPAN	STABLE AND NOT BROKEN EASILY, 5 TIMES LIFE SPAN OF MAGNET	EASILY BROKEN, RELATIVELY SHORT LIFE SPAN
REACTION SPEED	FASTER, TRIMMING REACTION SPEED IMPROVES 40% AND PRESSER FOOT REACTION SPEED IMPROVES 20.8%	RELATIVELY SLOW
PRESSER FOOT HEIGHT ADJUSTMENT	DIGITAL 13 LEVELS, ONE KEY TO PRECISE ADJUSTMENT	ADJUSTED BY TOOLS


1 Digital control, Convenient and durable

1.The height of the presser foot is adjusted by tap a button in 13 levels, It is Convenient, durable and efficient
2.The servo-driven has a long life and the durability of themotor is 5 times more than the electromagnet.

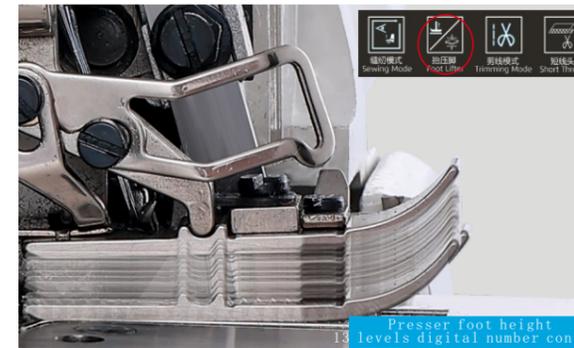



2 One machine to sew different kinds of fabrics

Easy to adjust the thickness in three levels from thin, medium to thick, suitable for sewing mesh, knitting, denim and other different fabrics and craftsmanship.

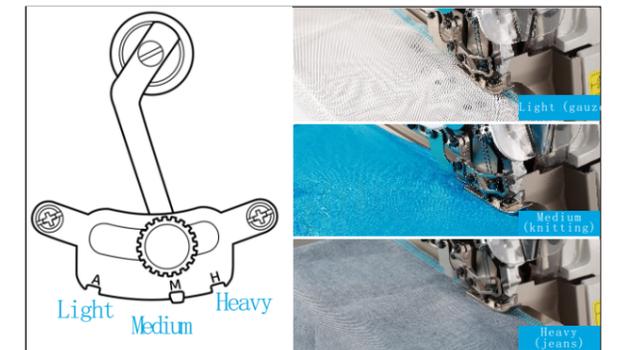

3 Fourth control box, Comfortable and relaxed

It equipped with Jack's newly upgraded 4th-generation control box, with optimized algorithms and control units, it enhanced the comfortable experience of human-computer interaction.The thread trimming response increased by 40%, the presser foot lifting response increased by 20.8%, and the start-stop response increased by 14.3%.

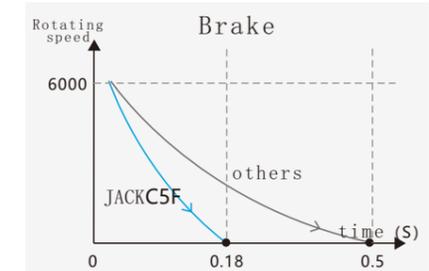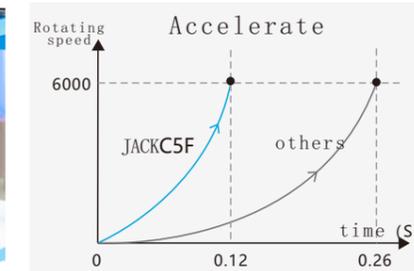

4 Ultra short thread tail, no need extra trimming

The unique fourth sensor, make the thread tail length no longer depends on the operator's skill, and the thread tail within 5mm after trimming, no need extra trimming

