


**JACK**

China No.1


Shanghai stock  
listed

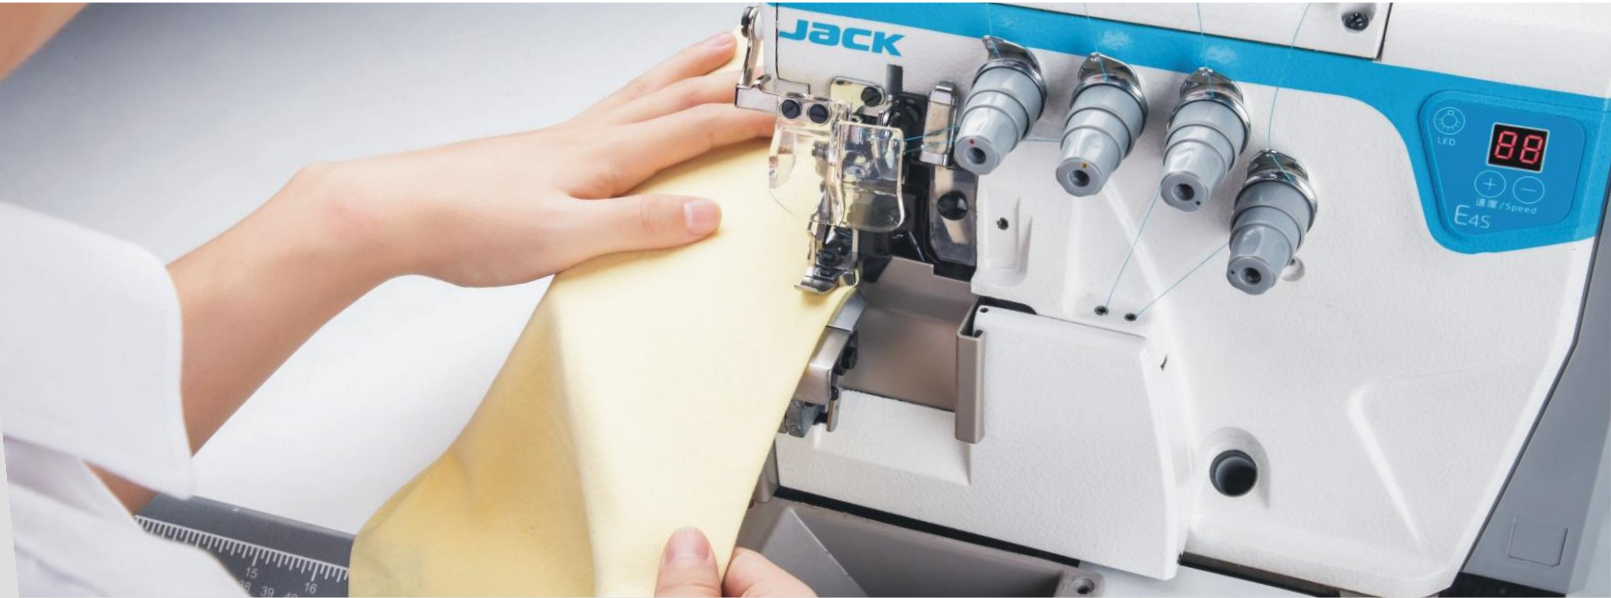

# Light and Heavy Adjustable Power Saving Overlock Machine




E4S

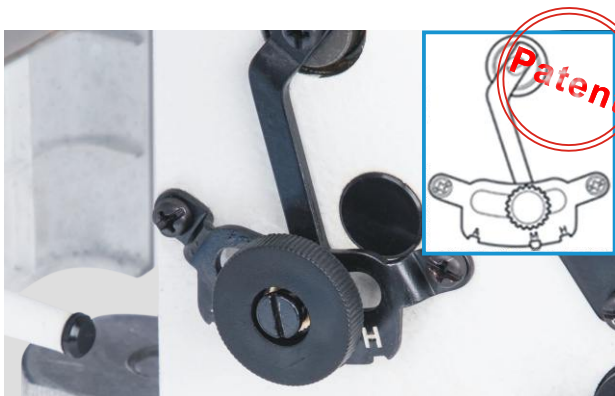

## 1 Light and heavy adjustable freely

Through light ,medium ,heavy three modes adjustment , can convert from A type–light material ,M type –medium material to H type –heavy material freely ;suitable for mesh, knitting ,denim ,etc different kinds of order demands.

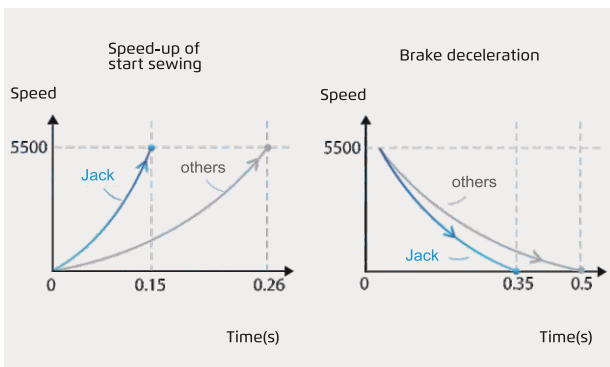

## 2 Super quick response for start and brake, strong and powerful

Compare with other direct-drive overlock machines, shorter 40-50% for comprehensive start and brake response time, obviously increase the efficiency, sewing speed experience is light and fast, increase income efficiently.


## 3 Needle bar avoid oil-leakage ,clean sewing

Needle bar adopts full sealed suction oil-return device, special oil seal for the feed bar, prevent oil outside efficiently and ensure the improvement of the product quality.



#### 4 One-key reset, easy learn and use

Keyboard type one-key reset design, no need training, easy operation; convenient upgrade interface design, can upgrade the software quickly, which help garment factory to keep up with the latest technology

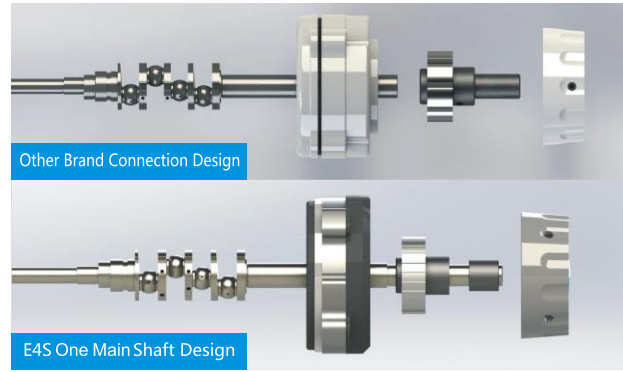

#### 5 One Main shaft design, stable and fast

Reduce the torque of the machine and ensure more stable running, sewing speed faster and more durable.

## Specification

| Model                                | Needle | Needle No. | Thread No. | Needle Distance (mm) | Stitch Width (mm) | Stitch Length (mm) | Differential Ratio | Presser Foot Lifting Height (mm) | Max. Speed (s.p.m) | Volume (mm) | Weight (kg) |
|--------------------------------------|--------|------------|------------|----------------------|-------------------|--------------------|--------------------|----------------------------------|--------------------|-------------|-------------|
| E4S-2(Fabric Joint Seaming)          | 11#    | 1          | 2          | —                    | 6                 | 4                  | 0.7-2              | 3.5                              | 5500               | 525*360*510 | 28/36       |
| E4S-02x250(Pocket Binding Seaming)   | 14#    | 2          | 4          | 5                    | —                 | 4                  | 0.7-2              | 3.5                              | 5500               | 525*360*510 | 28/36       |
| E4S-3-02/233(Plain Seaming)          | 11#    | 1          | 3          | —                    | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-3-82/233(Back Latching)          | 11#    | 1          | 3          | —                    | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-3-32R/233(Narrow Sewing)         | 9#     | 1          | 3          | —                    | 1.5               | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4SWF-3-02/213(Non-woven Material)   | 14#    | 1          | 3          | —                    | 4                 | 8.5                | —                  | 5.5                              | 5500               | 525*360*510 | 28/36       |
| E4S-4-M03/333(Plain Seaming)         | 11#    | 2          | 4          | 2                    | 4                 | 4.6                | 0.7-2              | 5.5                              | 5500               | 525*360*510 | 28/36       |
| E4S-4-83/323(Back Latching)          | 11#    | 2          | 4          | 2                    | 4                 | 4.6                | 0.7-2              | 5.5                              | 5500               | 525*360*510 | 28/36       |
| E4S-4-M03/333/H/M(Heavy Duty)        | 11#    | 2          | 4          | 2                    | 4                 | 4.6                | 0.7-2              | 5.5                              | 5500               | 525*360*510 | 28/36       |
| E4SMJ-4-53/233(Towel Ending)         | 11#    | 2          | 4          | 2                    | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-5-53/233(Tape Attaching Seaming) | 14#    | 2          | 5          | 3                    | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-5-02A/233(Light material)        | 11#    | 2          | 5          | 3                    | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-5-03/233(5x5 Stitch)             | 14#    | 2          | 5          | 5                    | 5                 | 4                  | 0.7-2              | 6                                | 5500               | 525*360*510 | 28/36       |
| E4S-5-03/333(3x4 Stitch)             | 14#    | 2          | 5          | 3                    | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-5-M04/435(Especially For Denim ) | 19#    | 2          | 5          | 5                    | 6                 | 5                  | 0.8-1.5            | 7                                | 5500               | 525*360*510 | 28/36       |
| E4S-5-A04/435(Extra Heavy Duty)      | 19#    | 2          | 5          | 5                    | 6                 | 5                  | 0.8-1.5            | 7                                | 5500               | 525*360*510 | 28/36       |
| E4S-6-03/333(Plain Seaming)          | 11#    | 3          | 6          | 3 × 2                | 4                 | 4                  | 0.7-2              | 5                                | 5500               | 525*360*510 | 28/36       |
| E4S-6-M04/435(Especially For Denim)  | 19#    | 3          | 6          | 5 × 2.5              | 3.5               | 5                  | 0.8-1.5            | 7                                | 5500               | 525*360*510 | 28/36       |

Note:H/M suitable for light and heavy; optional device KS (vertical suction device) and KH(horizontal suction device); machine volume:525\*360\*630(mm), weight 28/39(kg)



Jack Wechat



Jack Facebook

2020.12

---

**JACK SEWING MACHINE CO.,LTD.**

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC  
TEL: 0086-576-88177782 88177767  
FAX: 0086-576-88177787

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
[www.chinajack.com](http://www.chinajack.com)