



Technical parameters

Model	Sewing Range (mm)	Bobbin thread Hook type	Needle	Stitch No.	Thread No.	Stitch Length	Presser Foot Lifting Height (mm)	Max Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T3020M-D	300×200	Hook	DP×17 19#	1	2	0.1-12.7mm	22mm	2700	1220×1220×1320	222/288
JK-T4030M-D	400×300	Hook	DP×17 19#	1	2	0.1-12.7mm	22mm	2700	1220×1220×1320	222/288
JK-T6040M-D	600×400	Hook	DP×17 19#	1	2	0.1-12.7mm	22mm	2700	1920×1620×1440	343/479
JK-T2210-D	220×100	Shuttle	DP×17 19#	1	2	0.1-12.7mm	22mm	2700	1220×840×1320	136/186
JK-T3020-D	300×200	Shuttle	DP×17 19#	1	2	0.1-12.7mm	22mm	2700	1220×1220×1320	222/288
JK-T6040-D	600×400	Shuttle	DP×17 19#	1	2	0.1-12.7mm	22mm	2500	1920×1620×1440	343/479
JK-T10040-D	1000×400	Shuttle	DP×17 19#	1	2	0.1-12.7mm	22mm	2500	1920×1620×1440	352/488

Note: Model M is economic type



Jack Wechat



Jack Facebook

2020.3

JACK SEWING MACHINE CO.,LTD.

No.1008, Donghai Road East, Jiaojiang District, Taizhou city, Zhejiang, China.
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com




Pattern Sewing Machine (Suitcases and Bags)



JK-T3020M (4030M/6040M)/JK-T6040/10040 (2210/3020)

JK-T3020M (4030M/6040M)

Specifications: Model M economic pattern sewing machine

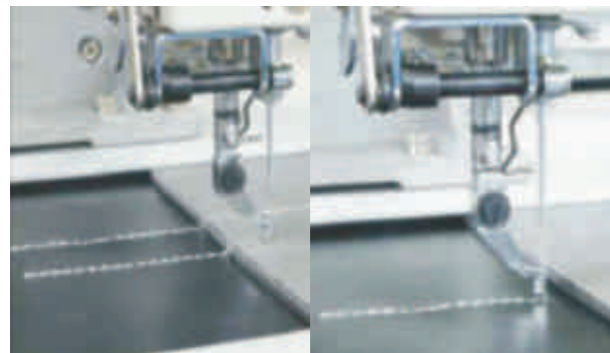

1 Program control middle presser foot

The height of the middle presser foot can be changed without stages, it can avoid the needle skipping, thread breaking cause the damage of products



2 Advanced LCD operation Panel

Easy to operate, with edit and modify patterns function



3 Thread breakage detection

Machine stop immediately when thread break to avoid the machine running without thread and damage the fabric



4 Customized service

According to the actual use of customers, we can provide customized camp and working area in various industries

JK-T6040/10040 (2210/3020)

Specifications: Wide range pattern sewing machine



JK-T6040




JK-T10040




1 External presser foot die function

Suitable for light and thick fabrics

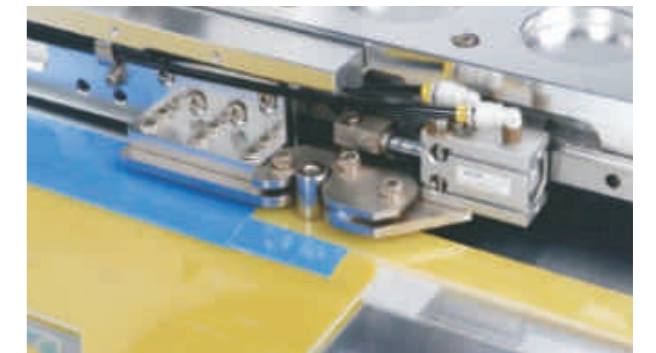

2 Automatic clamping device

Fast and convenient without wrong running

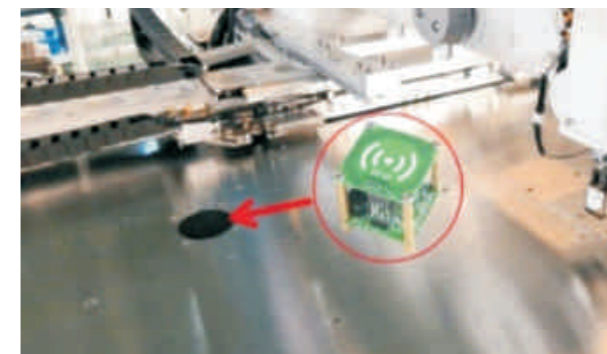

3 RFID module

Program automatic identification function, which can quickly get pattern information



4 6040 External pressure frame (optional)

External pressure frame auxiliary presser foot sewing is more stable